


## D shackle - Dia 14 mm

Part #1207

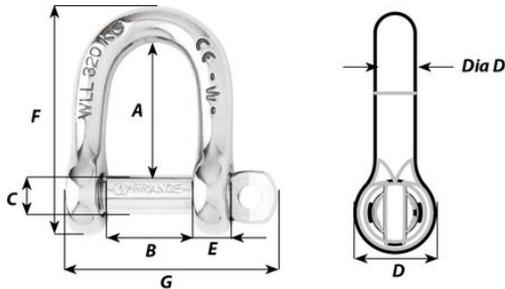

### Description

D shackle forged in grade 316L stainless steel  
The pin is locked into one of the indentations  
No risks of loose due to vibrations  
Outstanding working and breaking loads  
WLL: only for industrial applications (lifting i.e...)  
CE marking and batch number  
Part #1207 is not a self-locking D shackle

### Applications

Standard applications of shackle  
Attachment applications: blocks, head ...

## Technical information

|   |                           |
|---|---------------------------|
| Materials   | 316 stainless steel grade |
|  Working load (kg) | 2400                      |
|  WLL (kg)          | 1600                      |
| Breaking load (kg)  | 8000                      |
| Weight (g)  | 312                       |
| A (mm)  | 47                        |
| B (mm)  | 28                        |
| C (mm)  | 14                        |
| D (mm)  | 28                        |
| D diameter (mm)   | 14                        |
| E (mm)  | 13                        |
| F (mm)  | 82                        |
| G (mm)  | 78                        |

### Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.  
The safety factor is 5 times the breaking load.  
 $WLL = \text{Breaking load} / 5$

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.