


## Asymmetric carbin hook - Length: 80 mm

Part #2325

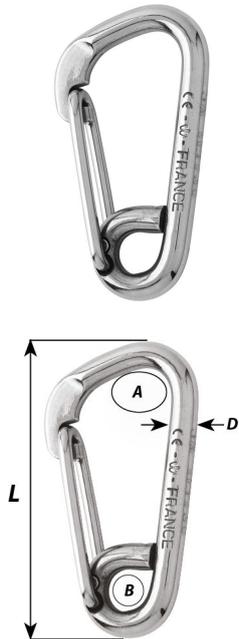

### Description

Grade 316L stainless steel carbine hooks  
Asymmetrical shape to support higher loads  
With eye to attach a webbing

### Applications

For fastening applications  
Integrated on Wichard tethers

## Technical information

Materials	316L stainless steel grade
Length (mm)	80
 Working load (kg)	960
 WLL (kg)	300
Breaking load (kg)	1500
Weight (g)	73
A (mm)	15
B (mm)	11
D diameter (mm)	8

### Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.  
The safety factor is 5 times the breaking load.  
 $WLL = \text{Breaking load} / 5$

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.