


## Captive pin twisted shackle - Dia 6 mm

Part #1423

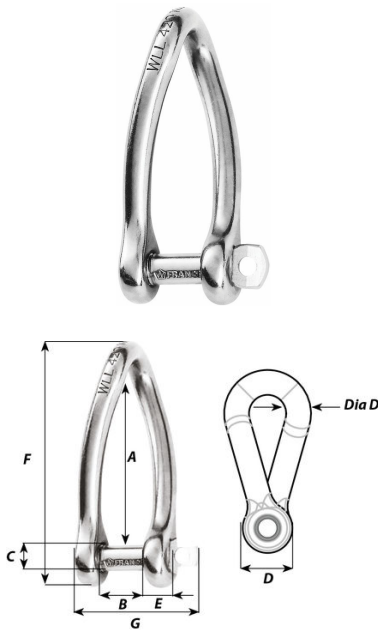

### Description

Captive pin twisted shackle forged in grade 316L stainless steel

The pin is connected to the body at all times even when opened

The pin is locked into one of the indentations

No risks of loose due to vibrations

Outstanding working and breaking loads

le manillon ne peut se perdre

Single handed operation for more safety

WLL: only for industrial applications (lifting i.e...)



CE marking and batch number

### Applications

Perfect for application where a 90° angle twist setup is required

Often used to attach an unarticulated part (block on a rail) or on purchases

## Technical information

Materials	316 stainless steel grade
 Working load (kg)	600
 WLL (kg)	440
Breaking load (kg)	2100
Weight (g)	39
A (mm)	44
B (mm)	12
C (mm)	7
D (mm)	14
D diameter (mm)	6
E (mm)	6
F (mm)	60
G (mm)	31

### Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.  
The safety factor is 5 times the breaking load.  
 $WLL = \text{Breaking load} / 5$

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.