

ASYMMETRIC SPINNAKER
GENNAKER & CODE ZERO

Furlers FX+

design by *Facnor* RATCHET SYSTEM

LIGHT / EASY TO FIT / AESTHETIC



Various attachments
Alternative 2-to-1 block fitting
(see reverse page)



Anti-impact cover for swivel
(delivered in standard kit)

In neoprene, high-visibility marking

Secured sail connection

Smooth push spring release device*; user friendly;
Unique design "by Facnor"
*except for FX+900 (secured with clevis pin)



Easy operation

Captive quick release pin
HR stainless steel

Easily fitted furling line

Thanks to a round and smooth notch on the drum edge



Carbon housing

Strong mechanism bodies
Machined from one single piece



Start and Go Rotation

drum self-locking device (optional). Fitted with a ratchet in S/s Duplex



360° orientating line exits

Stainless steel guide



Adjustable fastenings

Top and bottom adapted attachments (see reverse page)



NEW 2016!

Start and Go
Rotation system
Operational clockwise
or anti-clockwise

FX+
RATCHET SYSTEM

FX+ Carbon range of Gennaker/Code Zero furlers

FX+ evolution Endless line drum, large sized diameter for better control

FX+ models	FX+900	FX+1500	FX+2500	FX+4500	FX+7000	FX+12000	FX+20000
Boat length (m) (feet)	6 to 10.5 m 20 to 30'	10 to 12 m 30 to 40'	12 to 14 m 40 to 45'	13 to 16 m 42 to 55'	16 to 20 m 55 to 70'	+20 m +70'	+25 m +82'
Max Gennaker or Code zero area	30 m ² 322 ft ²	60 m ² 646 ft ²	100 m ² 1076 ft ²	140 m ² 1500 ft ²	250 m ² 2690 ft ²	350 m ² 3770 ft ²	+500 m ² +5380 ft ²
SWL*	0.9 T	1.5 T	2.5 T	4.5 T	7 T	12 T	20 T
Ratchet **	not available	not available	optional	optional	optional	not available	not available

** Retrofit on most 2016 models



Optional attachments & accessories


SR spliced ropes Quality selected ropes for a optimum grip and no excess of thickness.

SR models	SR06	SR08	SR10	SR12+
FX+ ref	900	1500 / 2500	4500	7000
∅ (mm) x length (m)	6 x 12 or 16	8 x 16 or 20	10 x 20 or 26	10 x 32
				On Request




TSL stanchion twin leads Ideal for a fast installation.

TSL models	TSL25	TSL28
Stanchion ∅ (mm)	25	28




SB snatch blocks* / pivoting carbon cheeks Easy rotation under high loads.

models	FRX1500	SB2500*	SB4500*	SB7000*
FX+ ref	1500	2500	4500	7000
Sheave ∅ (mm)	10	50	57	64
Height (mm)	50	77	84	93
Weight (g)	42	281	341	429
SWL*	1,5T	2,5T	4,5T	7T

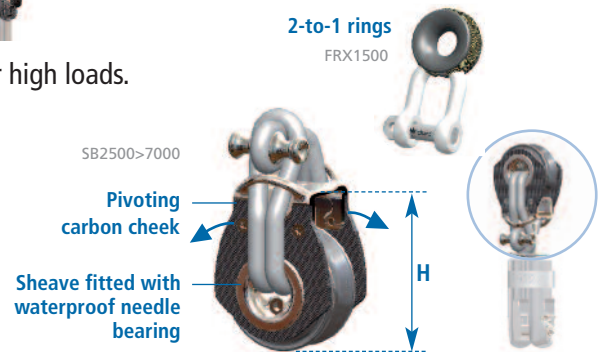


SSH stainless steel solid sheaves Compact and fitted with quick release pin.

SSH models	SSH1500	SSH+2500	SSH+4500	SSH+7000	SSH+12000
FX+ ref	1500	2500	4500	7000	12000
Height (mm)	49	60	69	73	84
Weight (g)	113	200	280	350	415

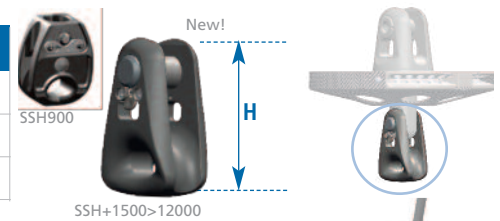

FAST asymmetric spinnaker thimbles Rotating tack fitting, sail furls in from head to tack.

FAST models	FAST 1500	FAST 2500	FAST 4500	FAST 7000	FAST 12000*
FX+ ref	1500	2500	4500	7000	12000
Height (mm)	65	82	92	119	142
Weight (g)	222	426	581	1114	1900
Max area (M ²)	80 M ²	110 M ²	200 M ²	270 M ²	contact us

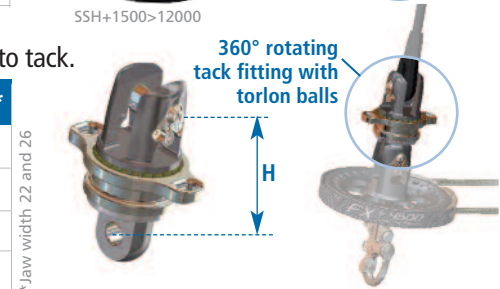

FCI stainless steel & FC+ aluminium thimbles for anti-twist rope

Specially designed to fit Facnor drum jaws. Thimbles efficiently transmit rotation.

Models	FCI1500	FCI2500	FCI4500	FC+20	FC+22	FC+24
FX+ ref	1500	2500	4500	7000	12000	20000
Rope ∅ (mm)	8	12	12/14/16	16/18/20	22	24
For pin ∅ (mm)	8	10	12	14	-	contact us
H (see against)	15	21	26	35	35	contact us

