

INFLATABLE FENDERS


Fendress inflatable fenders are designed to protect your boat efficiently when mooring or docking.

Les pare-battages Fendress sont conçus pour protéger votre bateau efficacement lors de l'amarrage ou de l'accostage.



Stainless steel D rings (top and bottom)
Tensile strength up to 3,5 t

Attaches inox en "D" (en haut et en bas)
Résistance à la traction jusqu'à 3.5 t

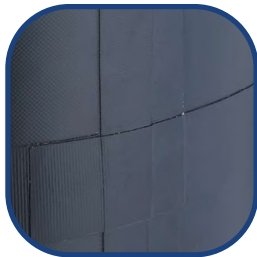

Kevlar® reinforcement strips
for maximum resistance

Bandes de renforcement en Kevlar®
pour une résistance optimale




Standard waterproof valve,
easy to inflate and deflate

Valve standard étanche pour
un gonflage et dégonflage rapide



Storage volume reduction

Réduction du volume de rangement

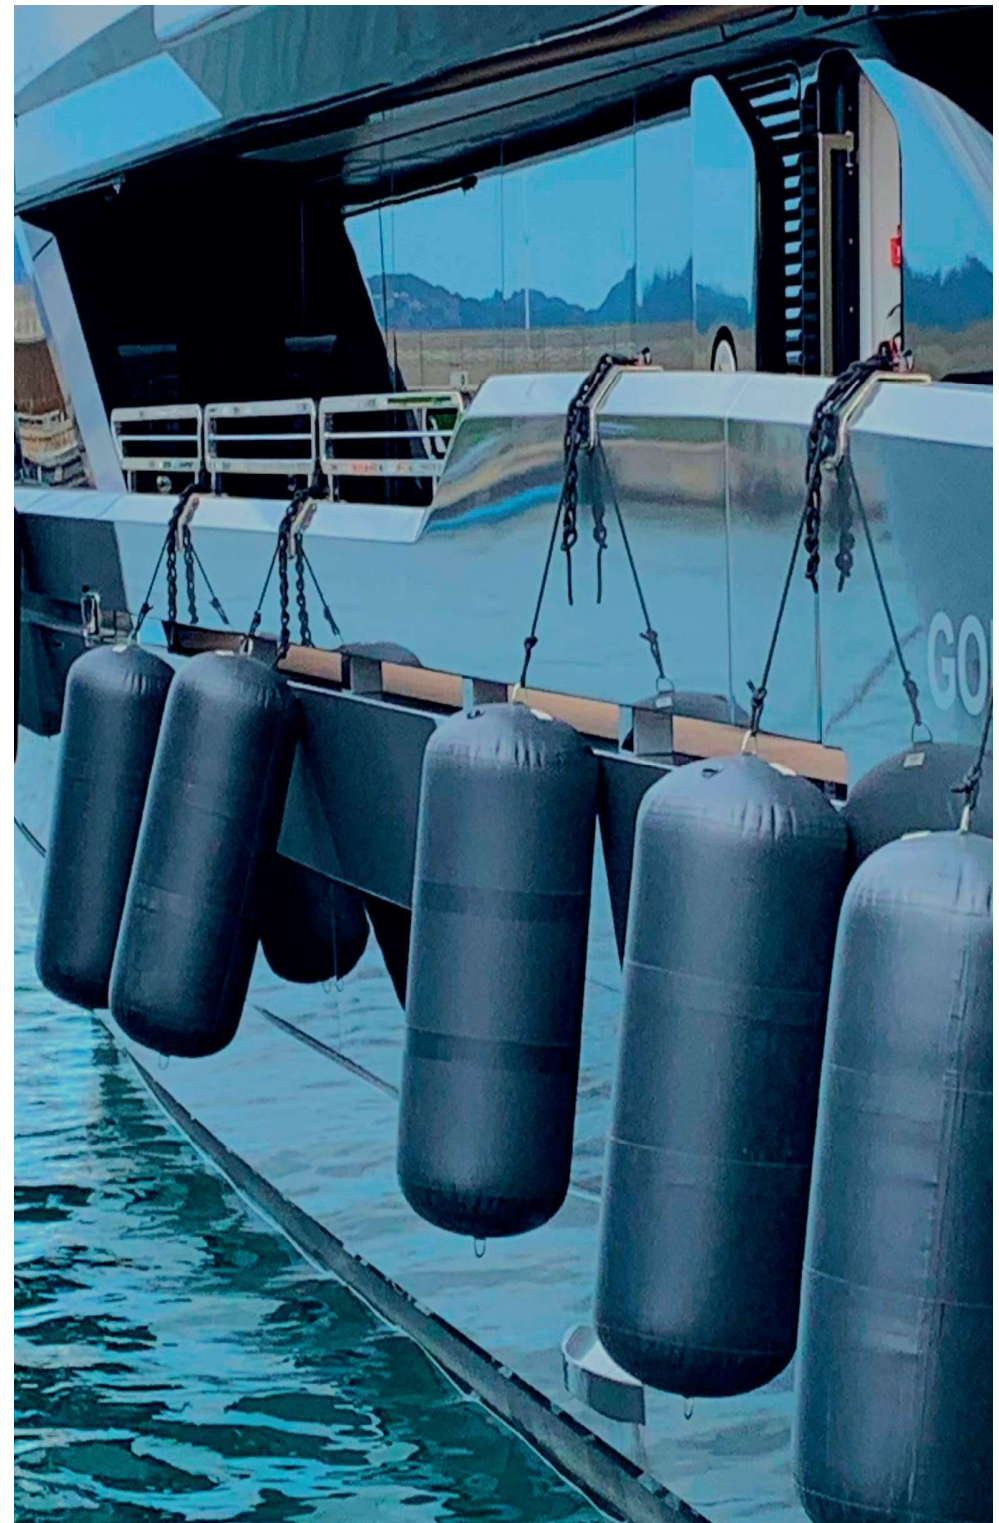

INFLATABLE FENDER ACCESSORIES



FENDER LOAD SPREADING KITS

For 1 D-ring, 3 D-Rings, 4 D-Rings
HR Wichard® S/S forged swivel
12 mm lines: black, navy, gold, anthracite

KITS DE REPARTITION DE CHARGE

Pour 1D-ring, 3 D-rings, 4 D-rings
Emerillon Wichard® inox forgé HR
Bout 12 mm: noir, bleu marine, or, anthracite



MOORING LINES AND ROPES

Mooring lines
Fender lines
Splicing

Lignes d'amarrages
Bouts
Epissures



PUMPS

Compact
Pump 230V / 1000 Watts
End piece compatible with
all fender brands

Compacte
Pompe 230V / 1000 Watts
Embouts compatible avec tous les
modèles de fenders

INFLATABLE FENDERS

HOW TO MEASURE?



	SF0302	SF0305
PVC Thickness	1.2 mm	1.2 mm
Body size (in or ft)	3x2 ft	5x3 ft
Body size (in or ft)	8 in	8 in
Total length (cm)	91x61	152x91
Thickness (cm)	21	21
Weight (kg)	3.3	7.4

2 D RINGS ON TOP
2 D RINGS ON BOTTOM



	BF-24	BF-26	BF-28	BF-30	BF-36	BF-38	BF-48
PVC Thickness	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm
Body size (in or ft)	24 in	26 in	28 in	30 in	36 in	38 in	48 in
Diameter (in or ft)	24 in	26 in	28 in	30 in	36 in	38 in	48 in
Total length (cm)	61	66	72	76	91	96	122
Diameter (cm)	61	66	72	76	91	96	122
Weight (kg)	2.9	3.4	4	4.5	6.4	7	9.9

1 D RING ON TOP
1 D RING ON BOTTOM
1 STRENGTHENED STRIP

TENSILE STRENGTH RESISTANCE 3,5 T

RESISTANCE TEST
ON OUR YOUTUBE PAGE FENDRESS FRANCE

5 COLOURS AVAILABLE



REFERENCE TABLES

CUSTOM
SIZES
UPON
REQUEST
PVC OR
HYPALON



IF-0922 IF-0930 IF-1229 IF-1242 IF-1296 IF-1436 IF-1445 IF-1458 IF-1829 IF-1842 IF-1845 IF-1858 IF-2429 IF-2442 IF-2458 IF-2665 IF-2466 IF-2496

PVC Thickness	0.9 mm	0.9 mm	0.9 mm	0.9 mm	0.9 mm	0.9 mm	0.9 mm	0.9 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm
Body size (in or ft)	22 in	30 in	29 in	42 in	96 in	36 in	45 in	58 in	29 in	42 in	45 in	58 in	29 in	42 in	58 in	65 in	66 in	96 in
Diameter (in or ft)	9 in	9 in	12 in	12 in	12 in	14 in	14 in	14 in	18 in	18 in	18 in	18 in	24 in	24 in	24 in	26 in	24 in	24 in
Total length (cm)	56	76	74	107	244	91	114	147	74	107	114	147	74	107	147	165	168	244
Diameter (cm)	23	23	30	30	30	36	36	36	46	46	46	46	61	61	61	66	61	61
Weight (kg)	0.8	0.9	1.2	1.7	3.8	1.8	2.2	2.9	3	3.7	3.8	4.8	3.7	4.8	6.7	7	7	5.6

2 STRENGTHENED STRIPS

1 D RING ON TOP
1 D RING ON BOTTOM



IF-3875 IF-0304 IF-0306 IF-0307 IF-0405 IF-0406 IF-0407 IF-0410 IF-0420

Thickness	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm	1.2 mm
Body size (in or ft)	75 in	4 ft	6ft	7 ft	5 ft	6 ft	7 ft	10 ft	20 ft
Diameter (in or ft)	38 in	3 ft	3 ft	3 ft	4 ft	4 ft	4 ft	4 ft	4 ft
Total length (cm)	191	125	183	210	150	183	210	300	600
Diameter (cm)	97	90	90	90	125	125	125	125	125
Weight (kg)	13.7	9.8	12	14	15.3	18.3	21.4	26.2	45

3 D RINGS ON TOP
3 D RINGS ON BOTTOM
2 STRENGTHENED STRIPS

4 D RINGS ON TOP
4 D RINGS ON BOTTOM
2 STRENGTHENED STRIPS

FENDER
ACCESSORIES
SEE PAGE. 13

