



# TuffLuff

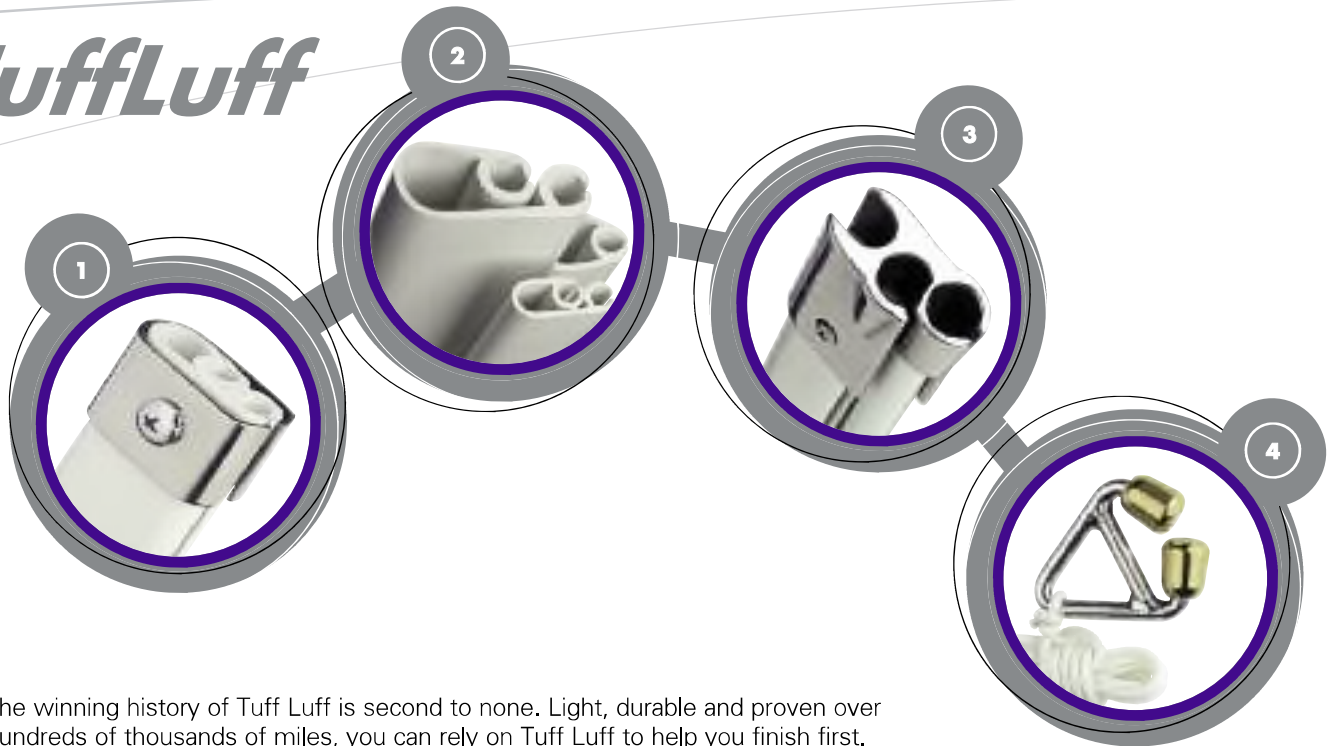

The winning history of Tuff Luff is second to none. Light, durable and proven over hundreds of thousands of miles, you can rely on Tuff Luff to help you finish first. Twin grooved foils allow for easy and fast sail changes keeping you in front. Available in sizes to fit wire/rod up to 3/4" (20mm), -76 rod.

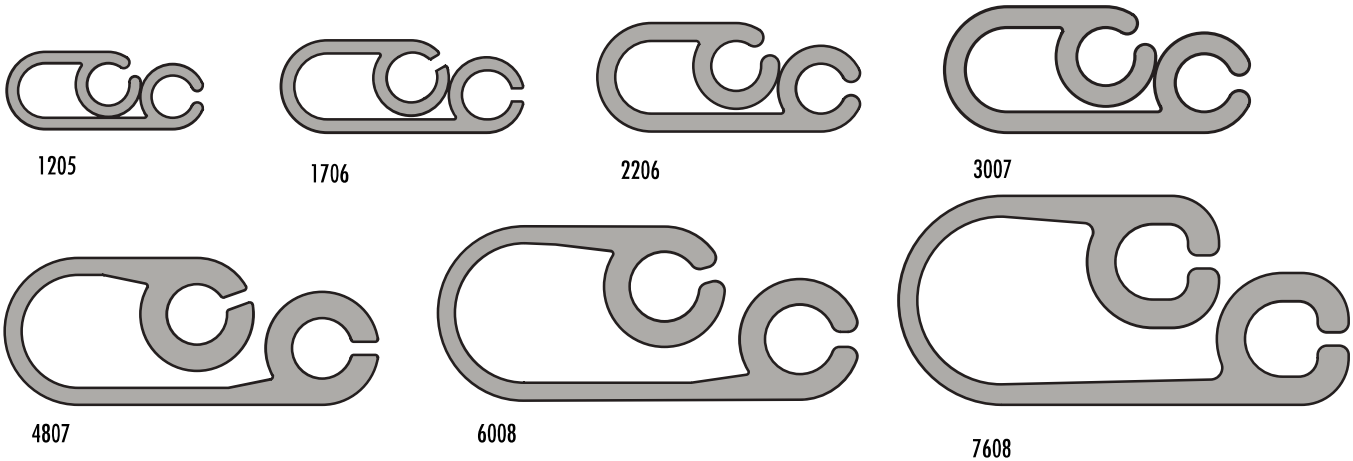

**1 Top Cap**  
Made of tough Stainless Steel, top caps safeguard against chafe caused by crossed or improperly lead halyards. The top cap is aerodynamic and extremely light to minimize weight aloft. It installs in minutes.

**2 Extrusion**  
Replacing your TuffLuff foil is literally a snap. We offer spare extrusions for every system, cut to standard lengths. The foil bottom is finished to accept the

**3 Feeder**  
Precision engineered feeders, made of high quality 316 Stainless Steel, fit neatly over the finished TuffLuff foil. The feeder guides the sail luff into the extrusion for a flawless hoist every time.

**4 Prefeeder**  
Oversized silicon bronze rollers smooth out the sail on its way to the feeder, assuring a perfect set and eliminating the need for crew to hand-feed the sail.

**5**

## UHMW Wear Tape

## How to select the proper Extrusion:

Select the maximum headstay which is greater or equal to your boat's headstay.

Match maximum headstay with your boat's headstay diameter. Please refer to our Specifications Chart for detailed information.

### Complete Kits Include:

- Extrusion
- Feeder
- Prefeeder-Lanyard
- Instructions
- TuffLuff Tape
- Sailing Tips
- (2) Spacer Tubes



Complete Kit	Extrusion Only	Extrusion Length	Max Head Stay Length	Max Wire	Max Rod	Luff Tape	Extrusion Weight*	Wear Tape (optional)	Top Cap	Feeder	Spacer Tube
1205-36	1205-36-EXT	36' (11m)	40' (12.2m)	1/4" (6mm)	-10	#5 (4mm) .159" OD	0.11 lbs./ft (0.16 kg/m)	TL-154	1205-13	1205-02	1205-03 44"
1205-46	1205-46-EXT	46' (14m)	50' (15.2m)	1/4" (6mm)	-10	#5 (4mm) .159" OD	0.11 lbs./ft (0.16 kg/m)	TL-154	1205-13	1205-02	1205-03 44"
1706-46	1706-46-EXT	46' (14m)	50' (15.2m)	5/16" (8mm)	-17	#6 (5mm) .197" OD	0.17 lbs./ft (0.25 kg/m)	TL-154	1706-13	1706-02	2206-03 44"
1706-59	1706-59-EXT	59' (18m)	63' (19.2m)	5/16" (8mm)	-17	#6 (5mm) .197" OD	0.17 lbs./ft (0.25 kg/m)	TL-154	1706-13	1706-02	2206-03 44"
2206-59	2206-59-EXT	59' (18m)	63' (19.2m)	3/8" (10mm)	-22	#6 (5mm) .197" OD	0.24 lbs./ft (0.36 kg/m)	TL-205	2206-13	2206-02	2206-03 44"
2206-72	2206-72-EXT	72' (22m)	76' (23.2m)	3/8" (10mm)	-22	#6 (5mm) .197" OD	0.24 lbs./ft (0.36 kg/m)	TL-205	2206-13	2206-02	2206-03 44"
3007-80	3007-80-EXT	80' (24.3m)	86' (26.1m)	7/16" (11mm)	-30	#7 (6mm) .236" OD	0.30 lbs./ft (0.45 kg/m)	TL-205	3007-13	3007-02	3007-03 60"
4807-95	4807-95-EXT	95' (28.9m)	101' (30.7m)	9/16" (14mm)	-48	#7 (6mm) .236" OD	0.41 lbs./ft (0.62 kg/m)	TL-205	4807-13	4807-02	4807-03 72"
6008-110	6008-110-EXT	110' (33.5m)	116' (33.5m)	3/4" (18mm)	-60	#8 (7mm) .275" OD	0.46 lbs./ft (0.69 kg/m)	TL-306	6008-13	6008-02	6008-03 72"
7608-130	7608-130-EXT	130' (39.6m)	136' (40.8m)	3/4" (20mm)	-76	#8 (7mm) .275" OD	0.51 lbs./ft (0.77 kg/m)	TL-306	---	7608-02	7608-03 72"

All 1205, 1706, and 2206 systems may be shipped UPS or FedEx.  
All 3007, 4807, 6008 and 7608 must be shipped by truck.