


"top-down" system



FX+ Furler

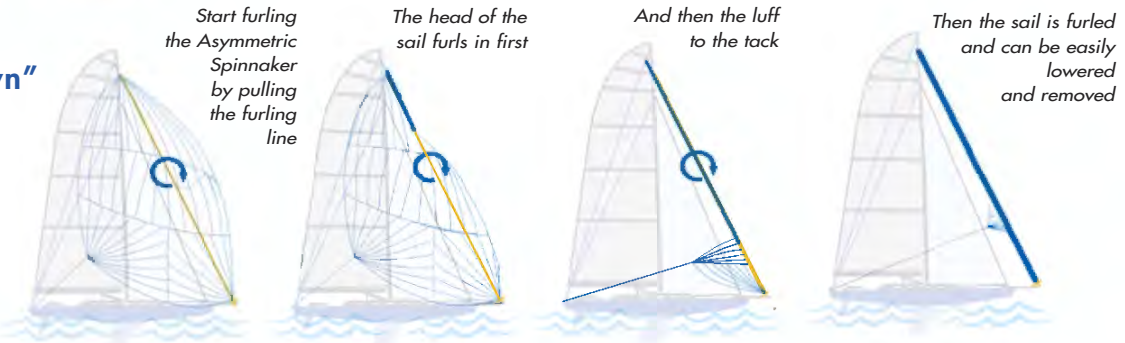

FAST thimble




■ Ratchet system (option)
see page 32 & 33

FX+ / FAST : FURLER MODELS

Model	FX+ FAST 900	FX+ FAST 1500	FX+ FAST 2500	FX+ FAST 4500	FX+ FAST 7000	FX+ FAST 12000
Boat length meter / feet	6 → 10,5 20 → 28'	10 → 12 28 → 40'	12 → 14 40 → 45'	13 → 16 42 → 55'	16 → 20 55 → 70'	contact us
Max asymmetric Spinnaker area	40 m ² 430 Ft ²	80 m ² 861 Ft ²	150 m ² 1614 Ft ²	240 m ² 2583 Ft ²	340 m ² 3660 Ft ²	

FX+ FAST: Option fitting for asymmetric Spinnaker
(System suitable for use with an existing FX furler)



Fast thimbles for FX+ furlers

Model	FX+/FXT Model	Jaw width (mm)	H Height (mm)	Weight (g)	Reference
FAST 900	FX+ 900	12	65	220	43230000940
FAST 1500	FX+ 1500	15	65	222	43230001540
FAST 2500	FX+ 2500	17,5	82	426	43230002540
FAST 4500	FX+ 4500	19	92	581	43230004540
FAST 7000	FX+ 7000	26	119	1114	43230007040
FAST 9000 Std	FX+ 9000	26	142	1915	43230120030
FAST 9000 Rac.		22	142	1915	43230120040
FAST 12000	contact us				
Custom	contact us				

■ Option Tack spool
contact us



New!



■ New Fast XL

Fast XL: larger model : Suitable for structural luff sails

XL Fast thimbles for FX+ furlers

Model	FX+ Model	Jaw width (mm)	H Height (mm)	Weight (g)	Reference
FAST XL 2500	FX+ 2500	17,5	82	426	43232002540
FAST XL 4500	FX+ 4500	19	92	581	43232004540
FAST XL 7000	FX+ 7000	26	119	1114	43232007040



Adjusting the tack :

■ To sail closer to the wind even better, it is necessary to lower the sail tack, this will push forward the belly. Inversely, lift up the tack and the belly of the sail will go aft, you will be able to sail further downwind.


Two options are available to adjust the tack of your asymmetric Spinnaker:

■ SSH+ solid sheave :

- used to adjust the tack point, with a maximum luff;
- This option is available from 1500 up to 12000 (above models on request).

→ see page 49

TACK ADJUSTMENT

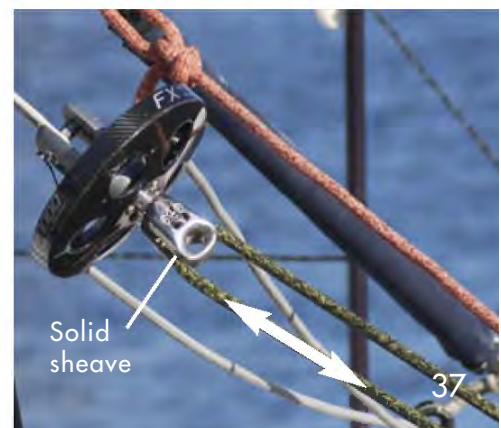

Solid sheave