


## Self-locking tack shackle - Dia 8 mm

Part #1234

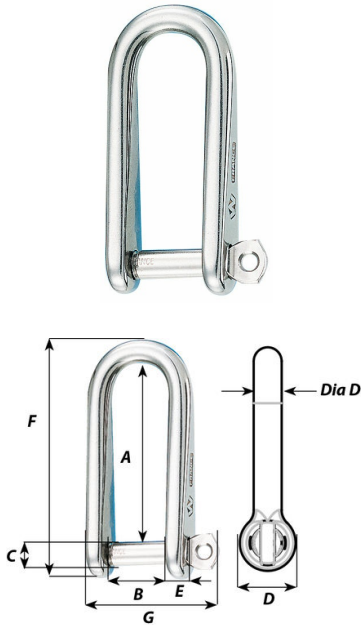


### Description

Self-locking twisted shackle with allen head pin forged in grade 316L stainless steel  
The pin is locked into one of the indentations  
The head of the pin does not stick out from the shackle body and thus eliminates any risk of snagging  
No risks of loose due to vibrations  
Outstanding working and breaking loads  
Specific model for tack point  
Designed for adjustment to the width of the gooseneck

### Applications

Tack point

## Technical information

Materials	316 stainless steel grade
 Working load (kg)	800
Breaking load (kg)	2300
Weight (g)	110
A (mm)	59
B (mm)	21
C (mm)	8
D (mm)	17
D diameter (mm)	8
E (mm)	6
F (mm)	79
G (mm)	45

### Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.  
The safety factor is 5 times the breaking load.  
 $WLL = \text{Breaking load} / 5$

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.